Copy
RM L52K28a

216

53-35-65.

NACA

RESEARCH MEMORANDUM

AVERAGE SKIN-FRICTION COEFFICIENTS FROM BOUNDARY-LAYER

MEASUREMENTS ON AN OGIVE-CYLINDER BODY IN

FLIGHT AT SUPERSONIC SPEEDS

By J. Dan Loposer

Langley Aeronautical Laboratory
Langley Field, Va.

RECEIPT SIGNATURE
REQUIRED

NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS
WASHINGTON
January 16, 1953

319.98/13

NACA RM L52K28a CONFIDENTIAL

NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

AVERAGE SKIN-FRICTION COEFFICIENTS FROM BOUNDARY-LAYER

MEASUREMENTS ON AN OGIVE-CYLINDER BODY IN

FLIGHT AT SUPERSONIC SPEEDS

By J. Dan Loposer

SUMMARY

Boundary-layer measurements on a rocket-powered free-flight model to determine average skin-friction coefficients have been made on an ogive-cylinder body of fineness ratio 15.9. Average skin-friction coefficients were obtained for the body area ahead of the fins over a range of Mach number from 1.3 to 2.5 and over a range of Reynolds number from 90.3×10^6 to 162.9×10^6 (based on axial body length to the measurement station). Comparison of the experimental data with a flat-plate skin-friction theory by Van Driest showed good agreement.

INTRODUCTION

In estimating the total drag of supersonic missile configurations the accuracy of the skin-friction drag estimate is significant, since skin friction can account for as much as 50 percent of the total drag. Most of the widely known skin-friction theories (refs. 1, 2, and 3) are developed for flow on a flat plate; however, some calculations (ref. 4) to evaluate the effect of body shape on the turbulent skin friction indicate an almost negligible effect for bodies of high fineness ratio. The present paper presents average skin-friction coefficients as determined from boundary-layer total-pressure rake measurements using the boundary-layer momentum theorem. Rake measurements were made at the 124-inch station on a fin-stabilized ogive-cylinder body of fineness ratio 15.9. The cylindrical section extended approximately 10 body diameters ahead of the measurement station. The model was rocket-powered and the flight test was made at the Pilotless Aircraft Research Station at Wallops Island, Va.

Friction coefficients are presented over a Mach number range from 1.3 to 2.5 and over a Reynolds number range from 90.3×10^6 to 162.9×10^6

CONFIDENTIAL

(based on axial body length to the measurement station). Results are
compared with Van Driest's theory (ref. 2) for skin friction on a flat
plate with heat transfer.

SYMBOLS

C_f average skin-friction coefficient

M   Mach number

T_w temperature of skin, ^oF abs

T_δ temperature just outside boundary layer, ^oF abs

R   Reynolds number, based on axial body length

u   velocity within the boundary layer, fps

MODELS AND TESTS

The general configuration of the test model is shown in figure 1.
The fuselage consisted of an ogival-nose section, a cylindrical center
section, and a boattailed rear section and was made of 0.064-inch-thick
duralumin skin with ring stiffeners. The fins were also of duralumin.
The model skin was highly polished prior to flight testing.

The model was boosted with two ABL Deacon rocket motors which pro-
vided a total impulse of about 19,800 pound-seconds each, over a time
of about 3.2 seconds. The sustainer motor within the model was a 65-inch-
long HVAR with 7700 pound-seconds impulse.

A photograph of the model with booster just prior to launching is
shown in figure 2.

The model was tracked by a CW Doppler velocimeter to obtain flight-
path velocity. An SCR 584 radar set was used to obtain the flight path.
Free-stream conditions of static pressure and temperature were obtained
from flight-path and radiosonde data. The model was equipped with an
NACA 10-channel tray-type telemeter. A six-tube total-pressure rake
(fig. 3) was used to obtain the total pressure and, hence, the Mach num-
ber through the boundary layer. Free-stream static pressure was used
as the static pressure at the rake station, since the measurement station
was 10 body diameters from the nose tangency point. The model was also

assumed to be flying at zero angle of attack because of the large sta-
bility margin. The skin temperature at the measurement station was
measured by a resistance-type temperature pickup (ref. 5) cemented to
the inside surface of the 0.064-inch-thick duralumin skin. The sustainer
rocket motor near the temperature pickup was covered with asbestos insu-
lation to prevent heat flowing to the skin.

Data were obtained only during the powered part of the flight
because of the failure of the model just prior to sustainer burnout.

RESULTS AND DISCUSSION

The skin-friction coefficients were obtained from boundary-layer
total-pressure surveys and skin-temperature measurements. The Mach
number distribution through the boundary layer was obtained from the
total-pressure measurements and the local static pressure on the body
which was assumed equal to measured free-stream static pressure. The
Mach number distribution and temperature measurements were used with
the Crocco temperature equation (ref. 6) to obtain a velocity and tem-
perature variation through the boundary layer. The Crocco temperature
equation was modified by a recovery factor of 0.89 to give a realistic
value of adiabatic wall temperature at the skin rather than stagnation
temperature. In reference 7 and in other references the value of 0.89
for the recovery factor has been found to be representative for turbu-
lent flow. Shown in figure 4 are typical boundary-layer velocity pro-
files obtained for two of the test conditions. From the velocity and
temperature distribution, the average skin-friction coefficient was
obtained by use of the boundary-layer momentum theorem. The procedure
for obtaining skin-friction coefficients from rake measurements is
described in reference 8.

Time histories of the measured, average skin-friction coefficients
for the area ahead of the measurement station and the average skin-
friction coefficients predicted by the Van Driest theory are shown in
figure 5 for the test Reynolds numbers, Mach numbers, and heating con-
ditions. Also shown in figure 5 are time histories of Mach number,
Reynolds number, T_w, and T_w/T_δ. Also shown on the plot of T_w/T_δ are
the values which would have existed for an insulated wall condition.
Although the cooling condition tends to raise the skin friction, the
high Mach numbers of the test bring the measured friction values below
those for incompressible flow at comparable Reynolds numbers.

The maximum difference between the experimental points and the
Van Driest theory is about 8 percent, with excellent agreement shown
over most of the range of test data.

CONCLUDING REMARKS

Average skin-friction coefficients have been measured on an ogive-cylinder body over a Mach number range from 1.3 to 2.5 and a Reynolds number range from 90.3×10^6 to 162.9×10^6. The experimental skin-friction coefficients were in good agreement with a flat-plate skin-friction theory by Van Driest.

Langley Aeronautical Laboratory,
    National Advisory Committee for Aeronautics,
        Langley Field, Va.

REFERENCES

1. Von Kármán, Th.: The Problem of Resistance in Compressible Fluids.
   R. Accad. d'Italia, Cl. Sci. Fis., Mat. e Nat., vol. XIV, 1936.
   (Fifth Volta Congress held in Rome, Sept. 30 - Oct. 6, 1935.)

2. Van Driest, E. R.: The Turbulent Boundary Layer for Compressible
   Fluids on a Flat Plate With Heat Transfer. Rep. No. AL-997,
   North American Aviation, Inc., Jan. 27, 1950.

3. Frankl, F., and Voishel, V.: Turbulent Friction in the Boundary
   Layer of a Flat Plate in a Two-Dimensional Compressible Flow at
   High Speeds. NACA TM 1053, 1943.

4. Hasel, Lowell E., Sinclair, Archibald R., and Hamilton, Clyde V.:
   Preliminary Investigation of the Drag Characteristics of the
   NACA RM-10 Missile at Mach Numbers of 1.40 and 1.59 in the
   Langley 4- by 4-Foot Supersonic Tunnel. NACA RM L52A14, 1952.

5. Fricke, Clifford L., and Smith, Francis B.: Skin-Temperature
   Telemeter for Determining Boundary-Layer Heat-Transfer Coefficients.
   NACA RM L50J17, 1951.

6. Crocco, Luigi: Transmission of Heat From a Flat Plate to a Fluid
   Flowing at a High Velocity. NACA TM 690, 1932.

7. Chauvin, Leo T., and deMoraes, Carlos A.: Correlation of Supersonic
   Convective Heat-Transfer Coefficients From Measurements of the
   Skin Temperature of a Parabolic Body of Revolution (NACA RM-10).
   NACA RM L51A18, 1951.

8. Rumsey, Charles B., and Loposer, J. Dan: Average Skin-Friction
   Coefficients From Boundary-Layer Measurements in Flight on a
   Parabolic Body of Revolution (NACA RM-10) at Supersonic Speeds and
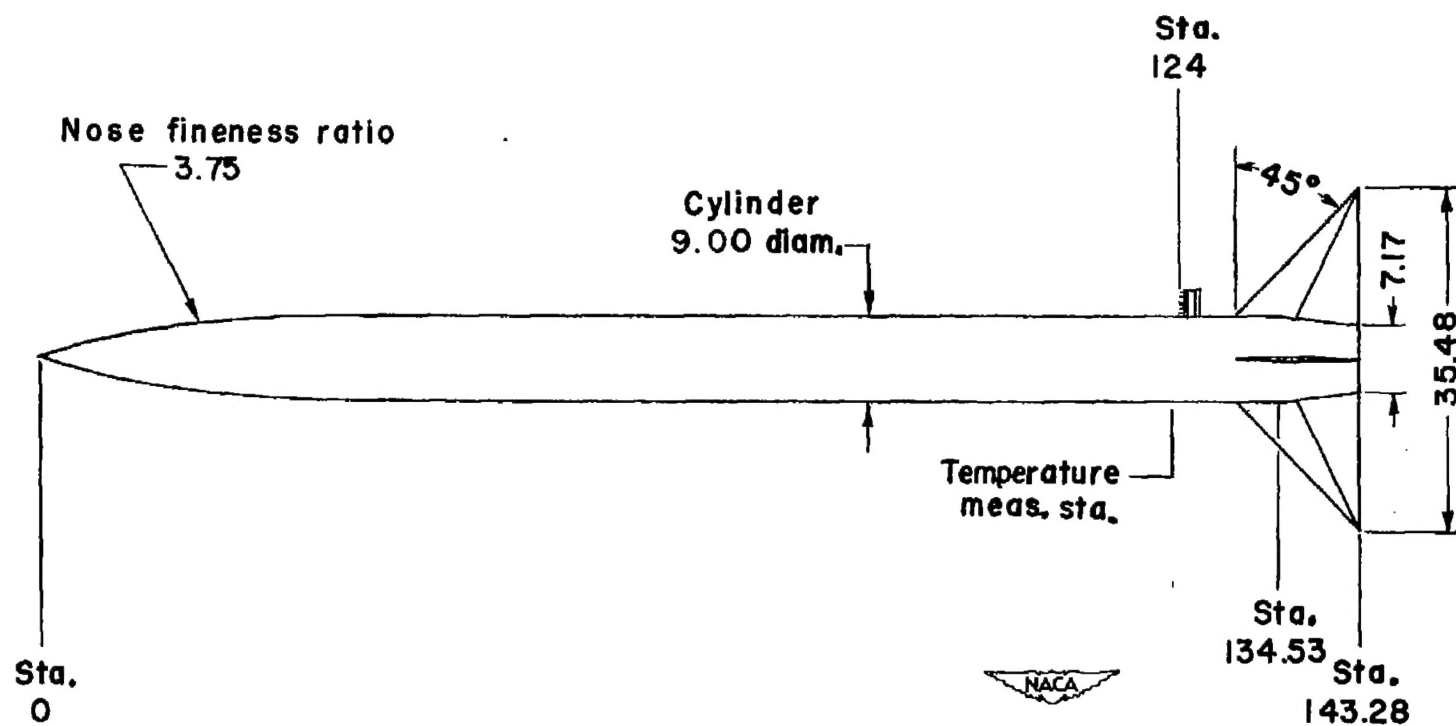   at Large Reynolds Numbers. NACA RM L51B12, 1951.

Sta.
124

Nose fineness ratio
3.75

Cylinder
9.00 diam.

45°

7.17

35.48

Temperature
meas. sta.

NACA

Sta.
0

Sta.
134.53

Sta.
143.28

Figure 1.- General configuration of test model. Dimensions are in inches.
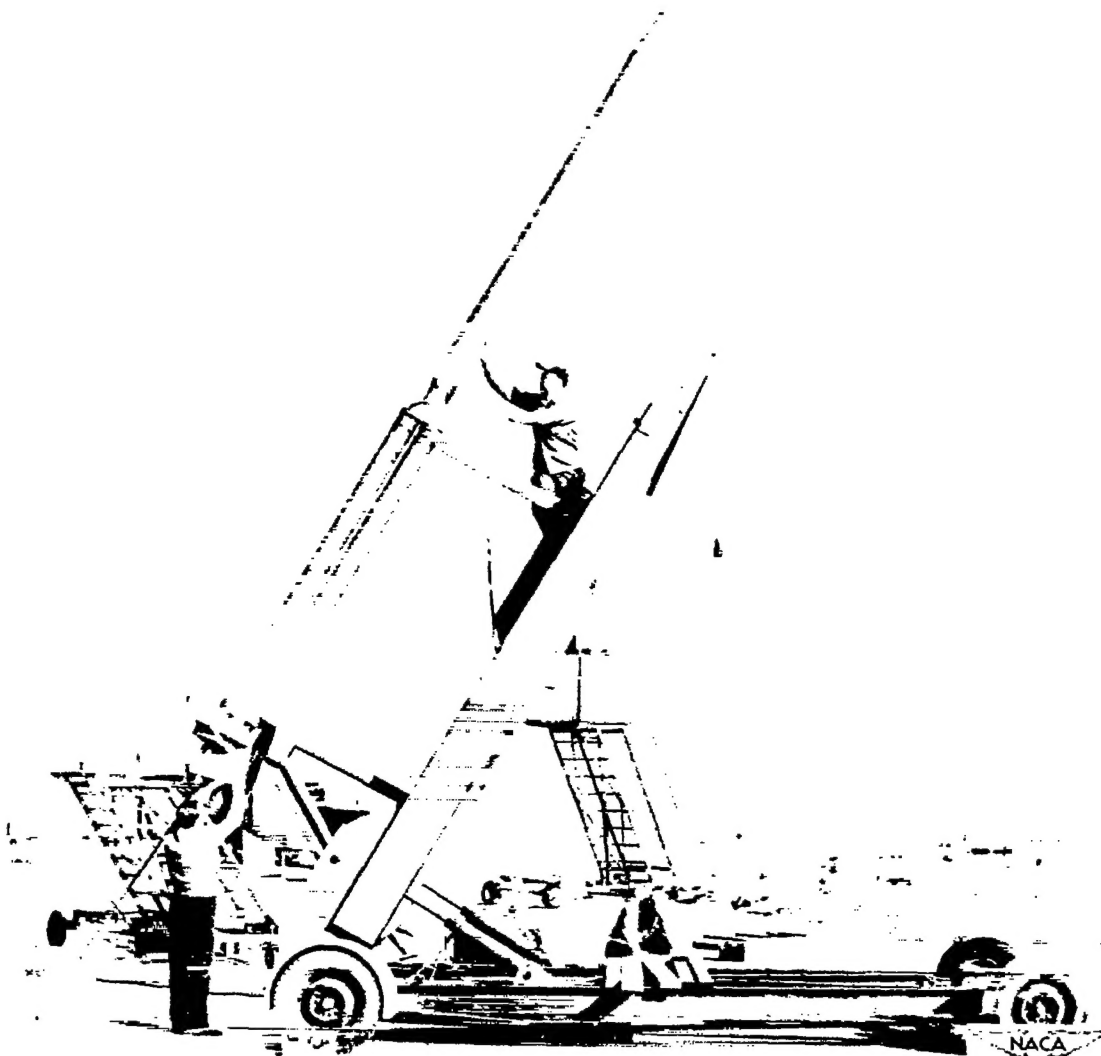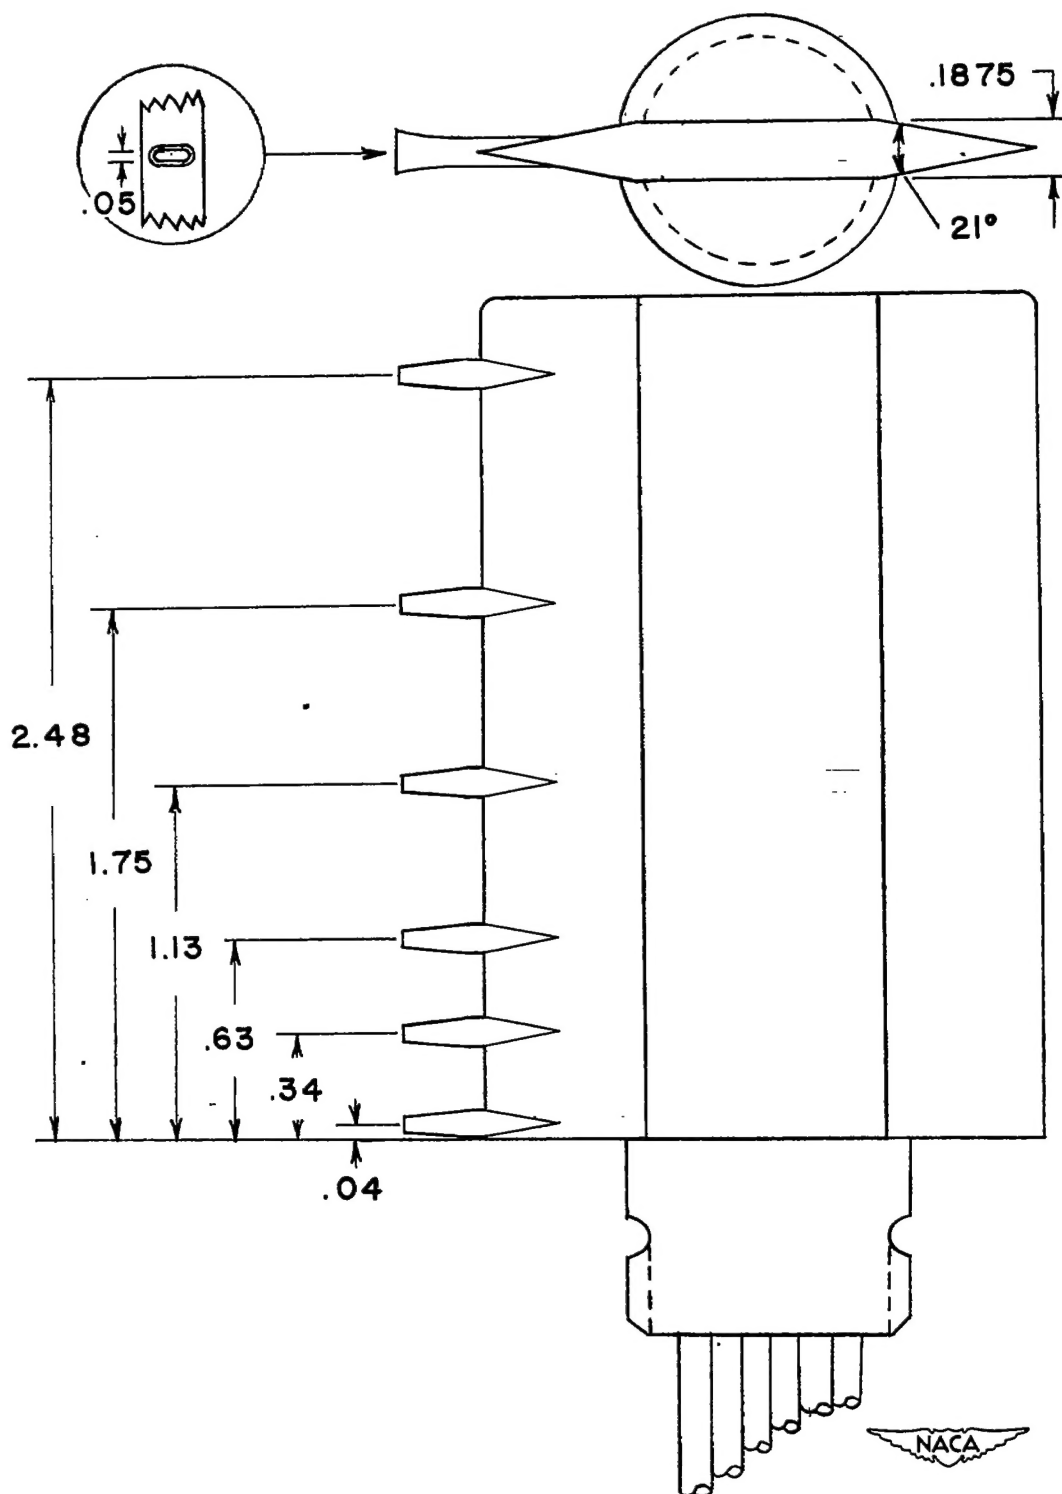
Figure 2.- Test model in launching position.

Figure 3.- Configuration of total-pressure rake. Dimensions are in inches.

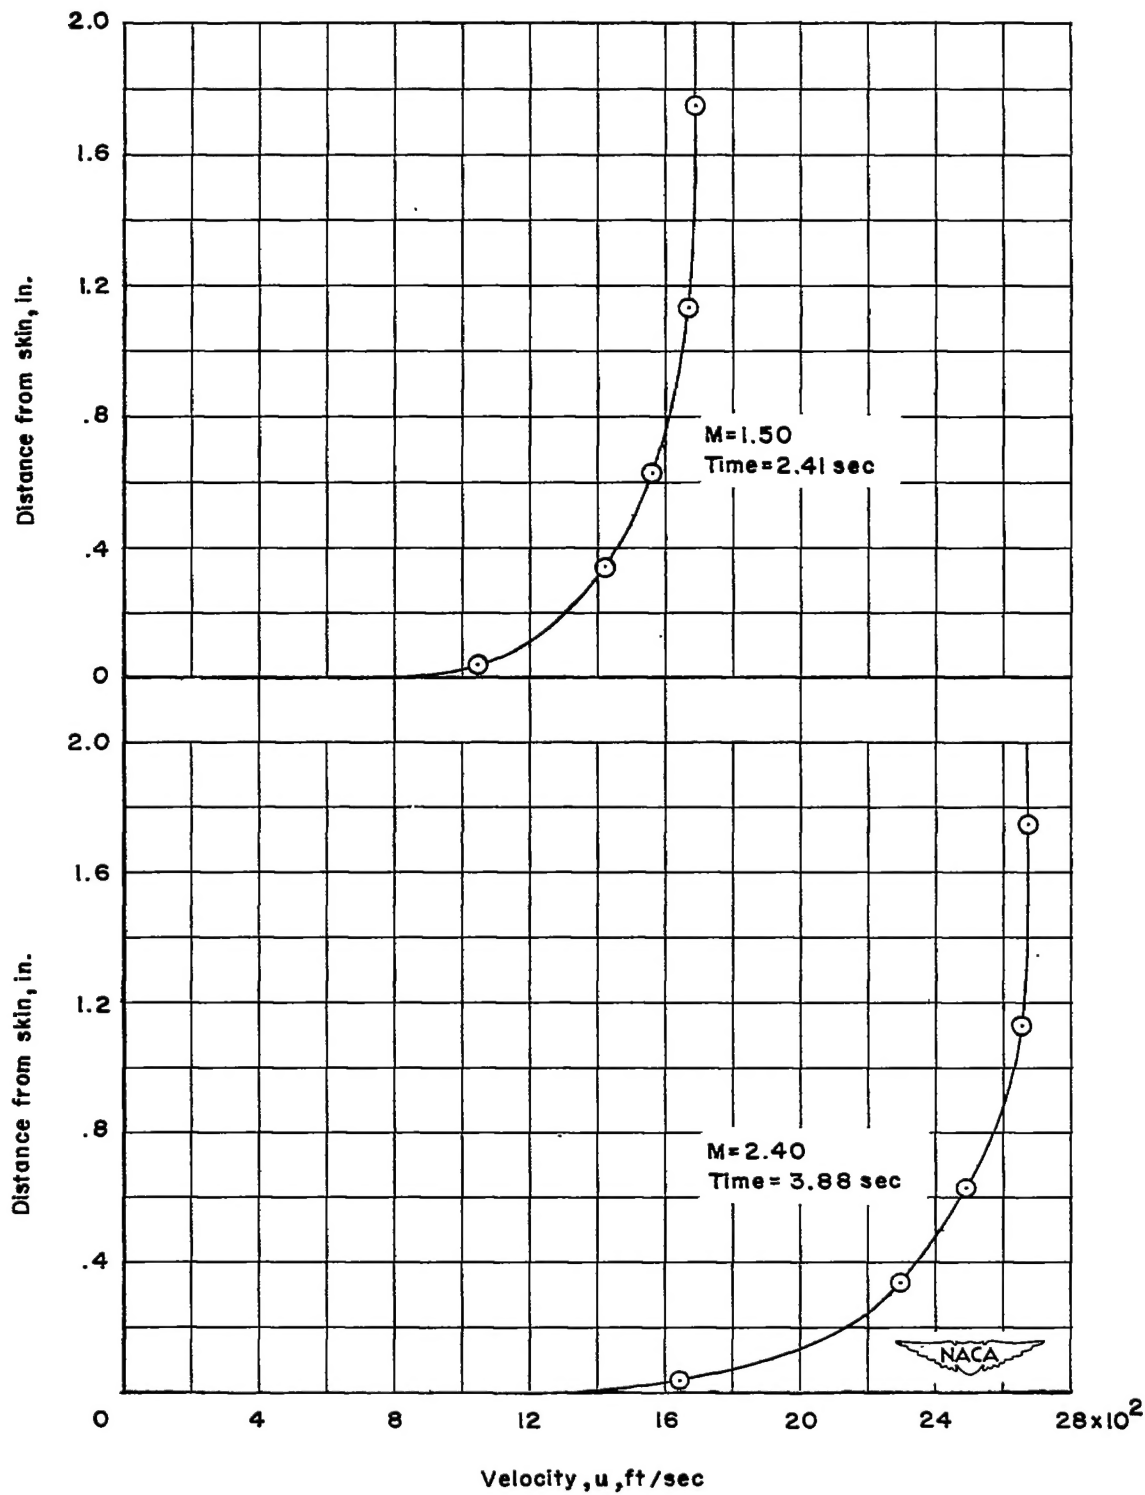Figure 4.- Typical boundary-layer velocity profiles.

200 x 10^6

R 100

0

3

2

M

1

0

3 x 10^{-3}

2

C_f

1

⊙ EXPERIMENTAL

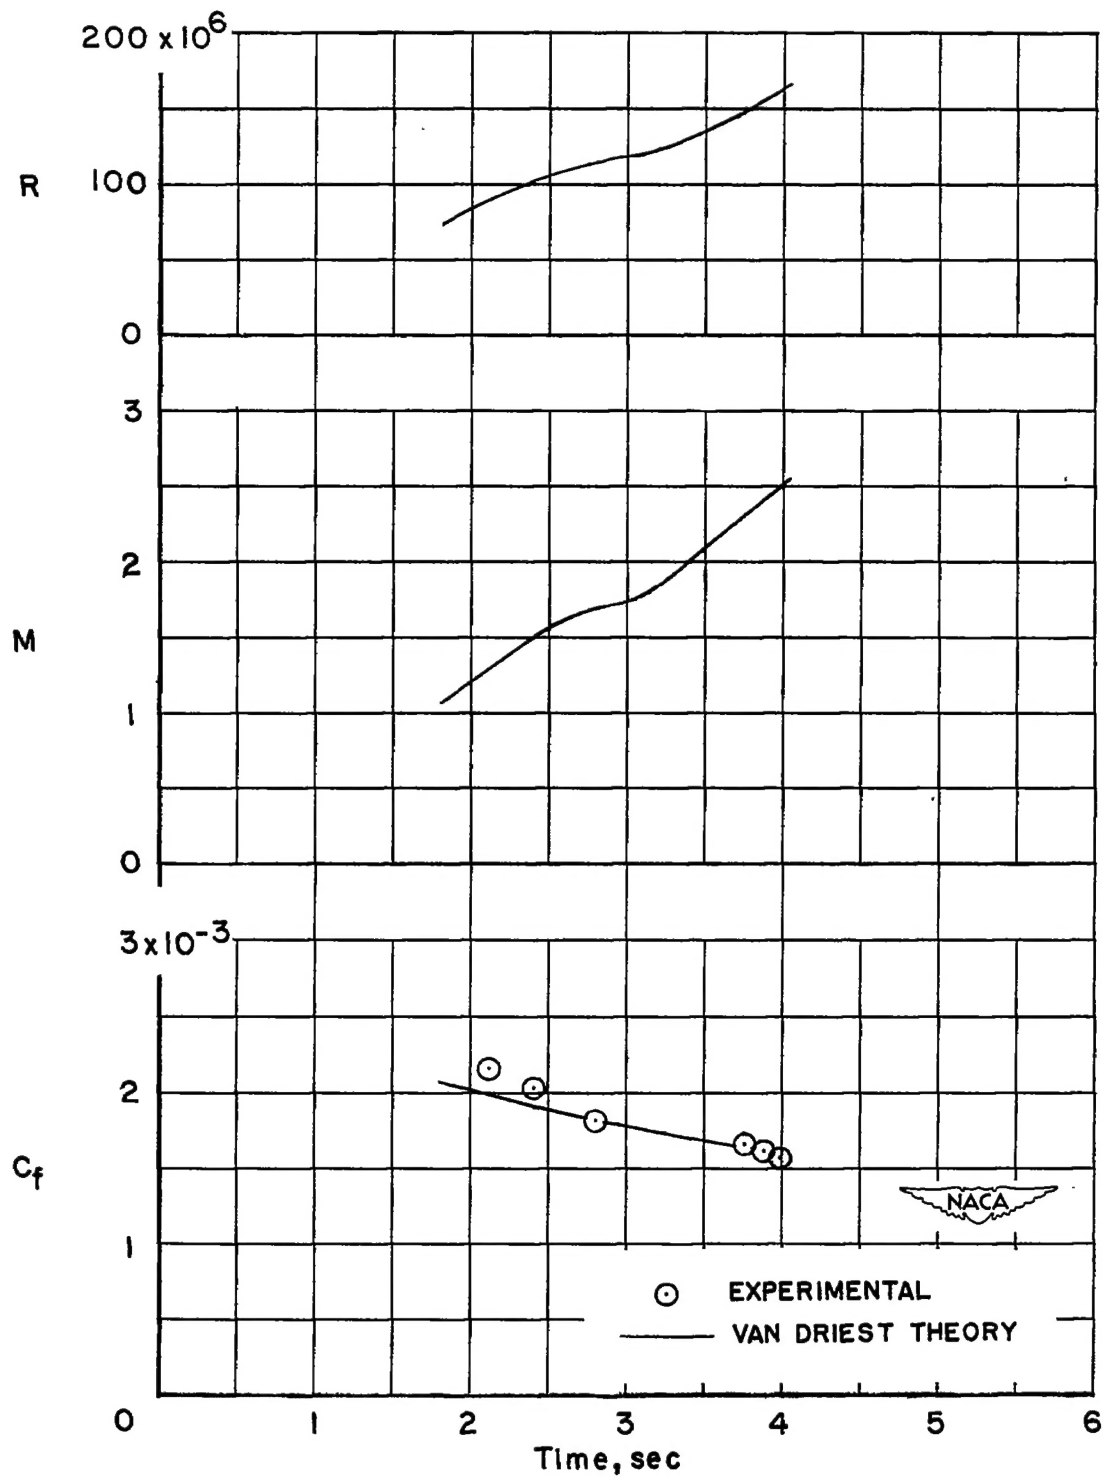—— VAN DRIEST THEORY

NACA

0 1 2 3 4 5 6

Time, sec

Figure 5.- Time histories of measured, average skin-friction coefficients and test conditions.

Figure 5.- Concluded.